
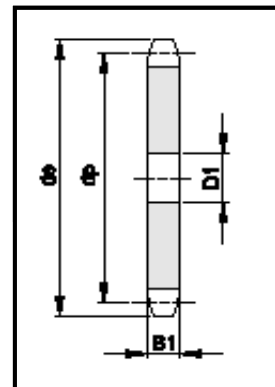




# PLAATWIELEN

Plaatwielen in simplex DIN 8187



**3/8" x 7/32"**

**06-B**

## Ketting:

Steek 9,525 mm  
Inw. Breedte 5,72 mm  
Rol diam. 6,35 mm





## Plaatwiel:

Tand radius, r 10 mm  
Radius breedte, C 1 mm  
Tand breedte, B1 5,3 mm

Z	de	dp	S
			D1
8	28,6	24,89	6
9	31,5	27,85	8
10	34,5	30,82	8
11	37,5	33,80	8
12	40,5	36,80	8
13	43,5	39,80	8
14	46,5	42,80	8
15	49,5	45,81	8
16	52,5	48,82	10
17	55,5	51,83	10
18	58,6	54,85	10
19	61,6	57,87	10
20	64,6	60,89	10
21	67,6	63,91	10
22	70,6	66,93	10
23	73,7	69,95	10
24	76,7	72,97	10
25	79,7	76,00	10
26	82,7	79,02	10
27	85,7	82,04	10
28	88,8	85,07	10
29	91,8	88,09	10
30	94,8	91,12	10
31	97,9	94,15	12
32	100,9	97,17	12

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

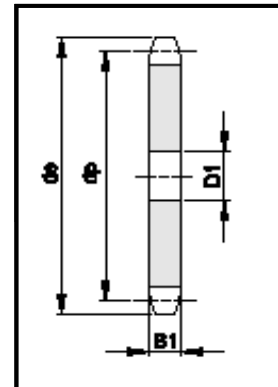

**3/8" x 7/32"**

**06-B**

## Ketting:

Steek 9,525 mm  
Inw. Breedte 5,72 mm  
Rol diam. 6,35 mm





## Plaatwiel:

Tand radius, r 10 mm  
Radius breedte, C 1 mm  
Tand breedte, B1 5,3 mm

Z	de	dp	S
			D1
33	103,9	100,20	12
34	106,9	103,23	12
35	110,0	106,26	12
36	113,0	109,29	12
37	116,0	112,32	12
38	119,0	115,34	12
39	122,1	118,37	12
40	125,1	121,40	12
41	129,0	124,43	16
42	132,1	127,46	16
43	135,1	130,49	16
44	138,1	133,52	16
45	141,1	136,54	16
46	144,2	139,58	16
47	147,2	142,61	16
48	150,2	145,64	16
49	153,3	148,66	16
50	156,3	151,69	20
51	159,3	154,72	20
52	162,4	157,75	20
53	165,4	160,78	20
54	168,4	163,82	20
55	171,4	166,85	20
56	174,5	169,88	20
57	177,5	172,91	20

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

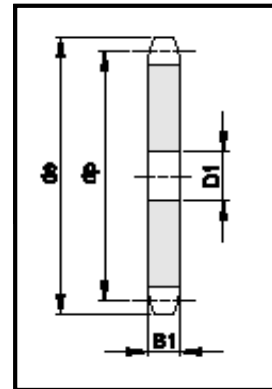

**3/8" x 7/32"**

**06-B**

## Ketting:

Steek 9,525 mm  
Inw. Breedte 5,72 mm  
Rol diam. 6,35 mm





## Plaatwiel:

Tand radius, r 10 mm  
Radius breedte, C 1 mm  
Tand breedte, B1 5,3 mm

Z	de	dp	S
			D1
58	180,5	175,93	20
59	183,6	178,96	
60	186,6	181,99	20
62	192,7	188,06	20
64	198,7	194,12	20
65	201,8	197,15	20
66	204,8	200,18	20
68	210,8	206,24	20
70	216,9	212,30	20
72	223,0	218,37	20
75	232,1	227,46	20
76	235,1	230,49	20
78	241,2	236,55	
80	247,2	242,61	20
85	262,4	257,77	25
90	277,5	272,93	25
95	292,7	288,08	25
100	307,8	303,25	25
110	338,2	333,55	25
114	350,3	345,68	25
120	368,5	363,86	25
125	383,6	379,02	25

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

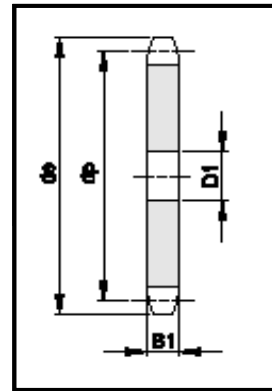

1/2" x 5/16"

08-B

## Ketting:

Steek 12,7 mm  
Inw. Breedte 7,75 mm  
Rol diam. 8,51 mm





## Plaatwiel:

Tand radius, r 13 mm  
Radius breedte, C 1,3 mm  
Tand breedte, B1 7,2 mm

Z	de	dp	S
			D1
8	38,0	33,18	8
9	42,0	37,13	8
10	45,9	41,10	8
11	49,9	45,07	10
12	53,9	49,07	10
13	57,9	53,06	10
14	61,9	57,07	10
15	65,9	61,09	10
16	69,9	65,10	10
17	74,0	69,11	10
18	78,0	73,14	10
19	82,0	77,16	10
20	86,0	81,19	10
21	90,1	85,22	12
22	94,1	89,24	12
23	98,1	93,27	12
24	102,1	97,29	12
25	106,2	101,33	12
26	110,2	105,36	16
27	114,2	109,40	16
28	118,3	113,42	16
29	122,3	117,46	16
30	126,3	121,50	16
31	130,4	125,54	16
32	134,4	129,56	16

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

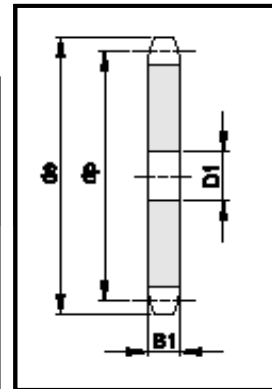

1/2" x 5/16"

08-B

## Ketting:

Steek 12,7 mm  
Inw. Breedte 7,75 mm  
Rol diam. 8,51 mm





## Plaatwiel:

Tand radius, r 13 mm  
Radius breedte, C 1,3 mm  
Tand breedte, B1 7,2 mm

Z	de	dp	S
			D1
33	138,4	133,60	16
34	142,5	137,64	16
35	146,5	141,68	16
36	150,6	145,72	16
37	154,6	149,76	16
38	158,6	153,80	16
39	162,7	157,83	16
40	166,7	161,87	16
41	172,4	165,91	20
42	176,5	169,95	20
43	180,5	173,99	20
44	184,6	178,03	20
45	188,6	182,07	20
46	192,6	186,10	20
47	196,7	190,14	20
48	200,7	194,18	20
49	204,8	198,22	20
50	208,8	202,26	20
51	212,8	206,30	20
52	216,9	210,34	20
53	220,9	214,37	20
54	225,0	218,43	20
55	229,0	222,46	20
56	233,0	226,50	20
57	237,1	230,54	20

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

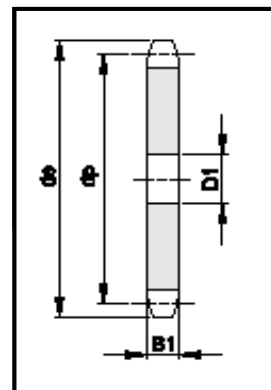

1/2" x 5/16"

08-B

## Ketting:

Steek 12,7 mm

Inw. Breedte 7,75 mm

Rol diam. 8,51 mm

## Plaatwiel:

Tand radius, r 13 mm





Radius breedte, C 1,3 mm

Tand breedte, B1 7,2 mm

Z	de	dp	S
			D1
58	241,1	234,58	20
59	245,2	238,62	
60	249,2	242,66	20
62	257,3	250,75	25
64	265,4	258,82	25
65	269,4	262,86	25
66	273,4	266,90	25
68	281,5	274,99	25
70	289,6	283,07	25
72	297,7	291,16	25
75	309,8	303,27	25
76	313,9	307,33	25
78	321,9	315,40	25
80	330,0	323,48	25
85	350,2	343,69	25
90	370,4	363,90	25
95	390,7	384,11	25
100	410,9	404,31	25
110	451,3	444,74	25
114	467,4	460,90	25
120	491,7	485,16	25
125	511,0	505,37	25

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

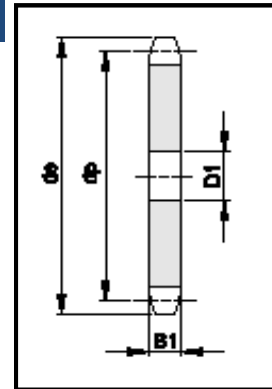

5/8" x 3/8"

10-B

## Ketting:

Steek 15,875 mm  
Inw. Breedte 9,65 mm  
Rol diam. 10,16 mm





## Plaatwiel:

Tand radius, r 16 mm  
Radius breedte, C 1,6 mm  
Tand breedte, B1 9,1 mm

Z	de	dp	S
			D1
8	48,4	41,48	10
9	53,3	46,42	10
10	58,3	51,37	10
11	63,2	56,34	10
12	68,2	61,34	10
13	73,2	66,32	10
14	78,2	71,34	12
15	83,2	76,36	12
16	88,3	81,37	12
17	93,3	86,39	12
18	98,3	91,42	12
19	103,3	96,45	12
20	108,4	101,49	12
21	113,4	106,52	12
22	118,4	111,55	12
23	123,5	116,58	12
24	128,5	121,62	12
25	133,6	126,66	12
26	138,6	131,70	16
27	143,6	136,75	16
28	148,7	141,78	16
29	153,7	146,83	16
30	158,8	151,87	16
31	163,8	156,92	16
32	168,9	161,95	16

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

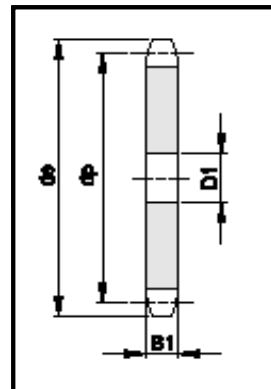

5/8" x 3/8"

10-B

## Ketting:

Steek 15,875 mm  
Inw. Breedte 9,65 mm  
Rol diam. 10,16 mm

## Plaatwiel:





Tand radius, r 16 mm  
Radius breedte, C 1,6 mm  
Tand breedte, B1 9,1 mm

Z	de	dp	S
			D1
33	173,9	167,00	16
34	178,9	172,05	16
35	184,0	177,10	16
36	189,0	182,15	20
37	194,1	187,20	20
38	199,1	192,24	20
39	204,2	197,29	20
40	209,2	202,34	20
41	215,8	207,39	20
42	220,8	212,44	20
43	225,9	217,49	20
44	230,9	222,53	20
45	236,0	227,58	20
46	241,0	236,63	20
47	246,1	237,68	20
48	251,1	242,73	20
49	256,2	247,78	20
50	261,2	252,82	20
51	266,3	257,87	20
52	271,3	262,92	20
53	276,4	267,97	20
54	281,4	273,03	20
55	286,5	278,08	20
56	291,5	283,13	25
57	296,6	288,18	25



# PLAATWIELEN

Plaatwielen in simplex DIN 8187

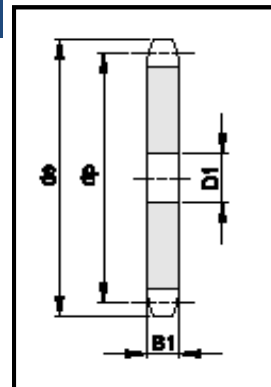

5/8" x 3/8"

10-B

## Ketting:

Steek 15,875 mm  
Inw. Breedte 9,65 mm  
Rol diam. 10,16 mm





## Plaatwiel:

Tand radius, r 16 mm  
Radius breedte, C 1,6 mm  
Tand breedte, B1 9,1 mm

Z	de	dp	S
			D1
58	301,6	293,23	25
59	306,7	298,27	
60	311,7	303,32	25
62	321,8	313,43	25
64	331,9	323,53	25
65	337,0	328,58	25
66	342,0	333,63	
68	352,1	343,74	25
70	362,2	353,84	25
72	372,3	363,95	25
75	387,5	379,09	25
76	392,5	384,16	25
78	402,6	394,25	25
80	412,7	404,35	25
85	438,0	429,62	30
90	463,3	454,88	30
95	488,5	480,14	30
100	513,8	505,40	30
110	564,3	555,92	30
114	584,5	576,13	30
120	614,8	606,44	30
125	640,1	631,71	30

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

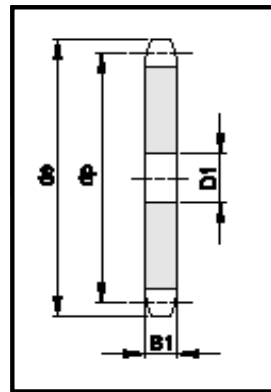

3/4" x 7/16"

12-B1

## Ketting:

Steek 19,05 mm  
Inw. breedte 11,68 mm  
Rol diam. 12,07 mm





## Plaatwiel:

Tand radius, r 19 mm  
Radius breedte, C 2 mm  
Tand breedte, B1 11,1 mm

Z	de	dp	S
			D1
8	58,0	49,78	10
9	63,9	55,70	10
10	69,8	61,64	10
11	75,8	67,61	12
12	81,8	73,50	14
13	87,8	79,59	14
14	93,8	85,61	14
15	99,8	91,63	14
16	105,8	97,65	14
17	111,9	103,67	14
18	117,9	109,71	14
19	123,9	115,75	14
20	130,0	121,78	14
21	136,0	127,82	16
22	142,0	133,86	16
23	148,1	139,90	16
24	154,1	145,94	16
25	160,2	152,00	16
26	166,2	158,04	16
27	172,3	164,09	16
28	178,3	170,13	16
29	184,4	176,19	16
30	190,4	182,25	16
31	196,5	188,31	20
32	202,5	194,35	20

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

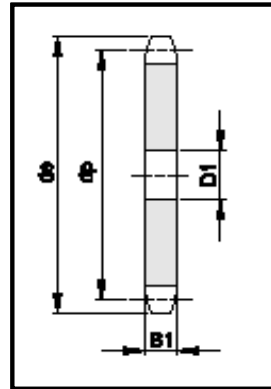

3/4" x 7/16"

12-B1

## Ketting:

Steek 19,05 mm  
Inw. breedte 11,68 mm  
Rol diam. 12,07 mm





## Plaatwiel:

Tand radius, r 19 mm  
Radius breedte, C 2 mm  
Tand breedte, B1 11,1 mm

Z	de	dp	S
			D1
33	208,6	200,40	20
34	214,6	206,46	20
35	220,7	212,52	20
36	226,8	218,58	20
37	232,8	224,64	20
38	238,9	230,69	20
39	244,9	236,75	20
40	251,0	242,81	20
41	258,9	248,97	25
42	265,0	254,93	25
43	271,1	260,98	25
44	277,1	267,03	25
45	283,2	273,10	25
46	289,2	279,16	25
47	295,3	285,21	25
48	301,4	291,27	25
49	307,4	297,33	25
50	313,5	303,39	25
51	319,5	309,45	25
52	325,6	315,50	25
53	331,6	321,56	25
54	337,7	327,64	25
55	343,8	333,70	25
56	349,8	339,75	25
57	355,9	345,81	25

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

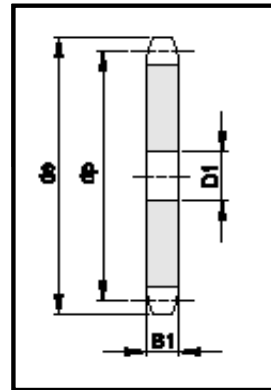

**3/4" x 7/16"**

**12-B1**

## Ketting:

Steek 19,05 mm  
Inw. breedte 11,68 mm  
Rol diam. 12,07 mm





## Plaatwiel:

Tand radius, r 19 mm  
Radius breedte, C 2 mm  
Tand breedte, B1 11,1 mm

Z	de	dp	S
			D1
58	362,0	351,87	25
59	368,0	357,93	
60	374,1	363,99	25
62	386,2	376,12	25
64	398,3	388,24	25
65	404,4	394,29	25
66	410,1	400,35	
68	422,6	412,49	30
70	434,7	424,61	30
72	446,8	436,74	30
75	465,0	454,91	30
76	471,1	460,99	30
78	483,2	473,10	30
80	495,3	485,22	30
85	525,6	515,55	30
90	555,9	545,86	30
95	586,2	576,17	30
100	616,6	606,47	30
110	677,2	667,11	30
114	701,4	691,36	30
120	737,8	727,74	30
125	768,1	758,05	30

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

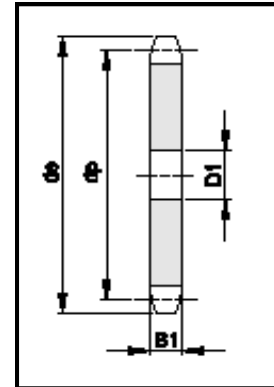

1" x 17,02 mm  
16-B1

## Ketting:

Steek 25,4 mm  
Inw. breedte 17,02 mm  
Rol diam. 15,88 mm





## Plaatwiel:

Tand radius, r 26 mm  
Radius breedte, C 2,5 mm  
Tand breedte, B1 16,2 mm

Z	de	dp	S
			D1
8	77,9	66,37	16
9	85,8	74,27	16
10	93,8	82,19	16
11	101,7	90,14	16
12	109,7	98,14	16
13	117,7	106,12	16
14	125,7	114,15	16
15	133,7	122,17	16
16	141,8	130,20	20
17	149,8	138,22	20
18	157,8	146,28	20
19	165,9	154,33	20
20	173,9	162,38	20
21	182,0	170,43	20
22	190,1	178,48	20
23	198,1	186,53	20
24	206,2	194,59	20
25	214,2	202,66	20
26	222,3	210,72	20
27	230,4	218,79	20
28	238,4	226,85	20
29	246,5	234,95	20
30	254,6	243,00	20
31	262,6	251,08	25
32	270,7	259,13	25

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

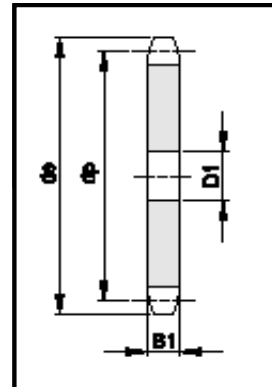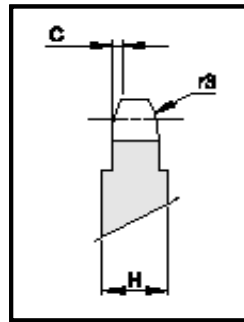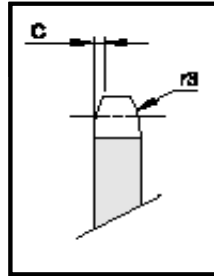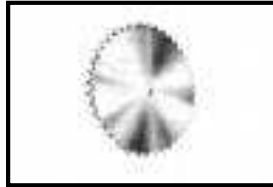

1" x 17,02 mm  
16-B1

## Ketting:

Steek 25,4 mm  
Inw. breedte 17,02 mm  
Rol diam. 15,88 mm





## Plaatwiel:

Tand radius, r 26 mm  
Radius breedte, C 2,5 mm  
Tand breedte, B1 16,2 mm

Z	de	dp	S
			D1
33	278,8	267,21	25
34	286,9	275,28	25
35	294,9	283,36	25
36	303,0	291,44	25
37	311,1	299,51	25
38	319,2	307,59	25
39	327,2	315,67	25
40	335,3	323,73	25
41	345,6	331,82	25
42	353,7	339,90	25
43	361,7	347,98	25
44	369,8	356,06	25
45	377,9	364,12	25
46	386,0	372,21	25
47	394,1	380,29	25
48	402,1	388,36	25
49	400,2	396,44	25
50	418,3	404,52	25
51	426,4	412,60	30
52	434,5	420,67	30
53	442,5	428,75	30
54	450,6	436,85	30
55	458,7	444,93	30
56	466,8	453,01	30
57	474,9	461,07	30

# PLAATWIELEN

Plaatwielen in simplex DIN 8187

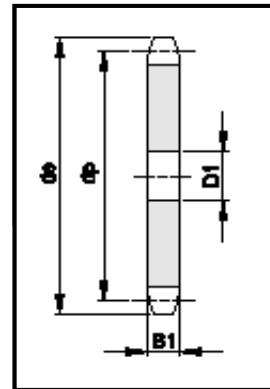

1" x 17,02 mm  
16-B1

## Ketting:

Steek 25,4 mm  
Inw. breedte 17,02 mm  
Rol diam. 15,88 mm

## Plaatwiel:

Tand radius, r 26 mm  
Radius breedte, C 2,5 mm  
Tand breedte, B1 16,2 mm

Z	de	dp	S
			D1
58	482,9	469,16	30
59	491,0	477,24	
60	499,1	485,32	30
62	515,3	501,50	30
64	531,4	517,65	30
65	539,5	525,73	30
66	547,6	533,80	
68	563,8	549,98	30
70	579,9	566,14	30
72	596,1	582,32	30
75	620,3	606,55	30
76	628,4	614,65	30
78	644,6	630,80	30
80	660,7	646,96	30
85	701,2	687,40	30
90	741,6	727,81	30
95	782,0	768,22	30
100	822,4	808,63	30
110	903,3	889,48	30
114	935,6	921,82	30
120	984,1	970,33	30
125	1024,5	1010,73	30