


Ketting	Steek	Rol diameter	Breedte tussen de binnenplaten	Pen diameter		Pen Lengte		Hoogte	Maximale trekkracht	Gemiddelde trekkracht	Gewicht per meter	Type
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	min			
	mm	mm	mm	mm	mm	mm	mm	mm	Kn	kN	kg/m	
08B HP	12,70	8,51	7,75	6,38	4,50	16,80	18,10	12,20	13,50	14,60	0,60	A
10B HP	15,88	10,16	9,65	7,03	5,00	18,60	20,80	14,30	14,50	15,60	0,83	A
12B HP	19,05	12,07	11,68	8,10	5,75	24,00	23,60	16,50	18,50	19,50	1,05	A
16B HP	25,40	15,88	17,02	11,10	8,10	36,00	38,00	21,00	50,00	60,30	2,40	A
HP35	35,00	20,00	16,00	13,35	10,20	30,40	31,60	26,30	23,52	26,40	2,02	A
40HP	12,70	7,95	7,85	5,63	4,00	16,50	17,60	12,00	11,00	12,20	0,54	B
50HP	15,88	10,16	9,40	7,03	5,13	20,70	21,90	15,09	20,00	22,10	0,91	B
60HP	19,05	11,91	12,70	8,31	6,00	25,80	26,40	18,00	24,00	26,90	1,29	B
80HP	25,40	15,88	15,75	11,10	8,03	32,70	33,90	24,00	52,00	60,30	2,50	B
08BHF	12,70	8,51	7,75	6,55	4,50	16,40	17,60	11,80	11,10	12,10	0,56	B
60HPF1	19,05	11,91	12,70	8,31	5,01	25,50	26,80	18,00	28,00	30,90	1,37	B

# Holleboutketting

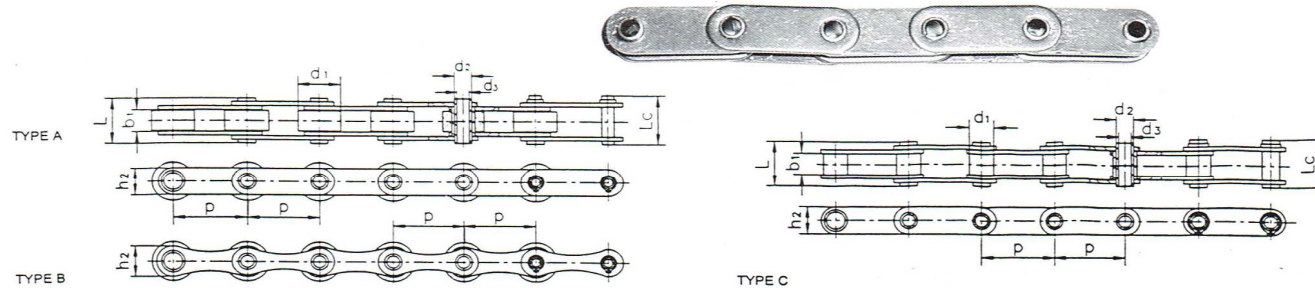

Ketting	Steek	Rol diameter	Breedte tussen de binnenplaten	Pen diameter		Pen Lengte		Hoogte	Maximale trekkkracht	Gemiddelde trekkkracht	Gewicht per meter	Type
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	min			
	mm	mm	mm	mm	mm	mm	mm	mm	Kn	kN	kg/m	
C2042HP	25,40	15,88	7,85	5,63	4,00	16,60	17,40	12,00	11,00	13,20	0,82	A
C2052HP	31,75	19,05	9,53	7,22	5,13	20,50	21,80	15,00	20,40	23,50	1,25	A
C2062HP	38,10	22,23	12,70	8,31	6,00	25,80	26,80	17,00	24,00	27,60	1,72	A
C2082HP	50,80	28,58	15,75	11,10	8,03	32,70	33,90	24,00	52,00	57,20	3,54	A
C2052HPPF1	31,75	19,05	9,40	7,03	5,12	20,00	21,50	15,30	15,00	17,30	1,21	A
63HPPF1	63,00	40,00	15,00	16,00	12,10	35,00	36,20	28,50	50,00	56,70	4,20	A
HP50	50,00	31,00	14,50	13,20	10,43	31,10	32,50	25,00	30,00	34,20	3,29	A
FK4202HP	50,80	31,80	15,00	14,00	10,10	36,30	39,00	26,00	42,00	51,60	3,75	A
FK4203HP	76,20	31,80	15,00	14,00	10,10	36,30	39,00	26,00	42,00	47,10	3,01	A
FK42035HP	88,90	31,80	15,00	14,00	10,10	36,30	39,00	26,00	42,00	51,10	2,79	A
FK4204HP	101,60	31,80	15,00	14,00	10,10	36,30	39,00	26,00	42,00	51,60	2,63	A
FK8403HP	76,20	47,60	19,00	19,05	13,60	43,80	46,30	39,00	84,30	97,70	6,81	A
FK8404HP	101,60	47,60	19,00	19,05	13,60	43,80	46,30	39,00	84,30	97,70	5,78	A
2060HPF	38,10	20,00	8,00	8,00	5,30	19,60	20,70	17,30	25,00	28,80	0,98	B
FK1650HP	50,80	30,00	10,50	11,40	8,20	27,40	28,60	26,00	50,00	53,60	2,56	B
HB63	63,00	30,00	10,00	11,40	8,10	26,70	28,10	26,50	50,00	53,60	2,07	B
FK16100HP	100,00	30,00	10,50	11,40	8,20	27,40	28,60	26,00	50,00	53,60	1,56	B
C2040HP	25,40	7,95	7,85	5,63	4,00	16,60	17,40	12,00	11,00	12,20	0,46	C
C2050HP	31,75	10,16	9,40	7,03	5,13	20,90	21,90	15,09	20,00	22,10	0,76	C
C2060HP	38,10	11,91	12,70	8,31	6,00	25,80	26,80	17,00	24,00	28,80	1,02	C
C2080HP	50,80	15,88	15,75	11,10	8,03	32,70	33,90	24,00	52,00	60,30	1,98	C
HP50F1	50,00	26,00	14,50	20,00	14,70	35,30	36,20	40,00	30,00	33,60	3,98	C